


**PSH Series Buffer (Heating) Tank**



steel buffer tank for heating systems

- 80-100 mm foam insulation
- Removable insulation jacket
- Optional flange for access (210 x 280 mm) & possible fitting of heat exchanger

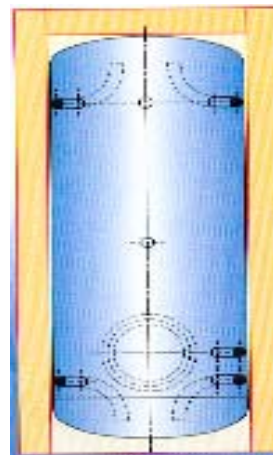

<b>Technical Data:</b>	<b>PSH 400</b>	<b>PSH 500</b>	<b>PSH 750</b>	<b>PSH 1000</b>	<b>PSH 1500</b>	<b>PSH 2000</b>
Height	1610 mm	1960 mm	1970 mm	2010 mm	2130 mm	2410 mm
Ø with insulation	760 mm	800 mm	950 mm	1050 mm	1200 mm	1300 mm
Ø without insulation	600 mm	600 mm	750 mm	850 mm	1000 mm	1100 mm
Weight	84 kg	95 kg	140 kg	195 kg	259 kg	301 kg
Heating connections	1"	1 1/4"	1 1/4"	1 1/4"	2"	2"
Vent	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"
Sensor pocket	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"
Max. operating pressure	3 bar	3 bar	3 bar	3 bar	3 bar	3 bar
Max. temperature	95 <sup>0</sup>	95 <sup>0</sup>	95 <sup>0</sup>	95 <sup>0</sup>	95 <sup>0</sup>	95 <sup>0</sup>

Buffer tanks also available with internal heat exchanger (PS Series) or glass-enamel (PSB Series).  
 Buffer tanks can be custom designed with additional tapping points and/or heat exchangers.