



## SSH Series Solar Dual-Coil Cylinders

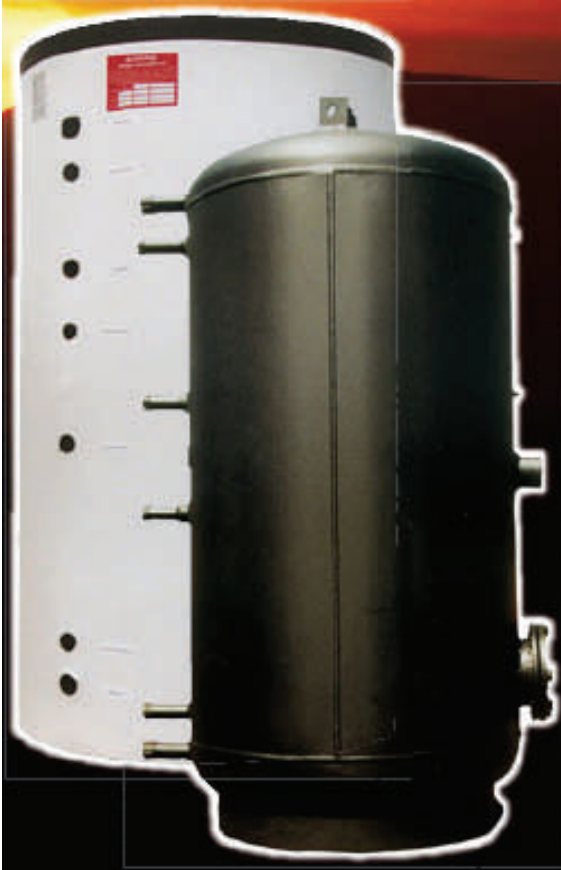

### Glass-enamelled steel dual-coil solar cylinder

- Large heat exchangers
- 80-100 mm foam insulation
- Removable insulation jacket
- Internal 2-coat glass enamel
- Magnesium anode
- Variable sensor positioning
- Immersion port

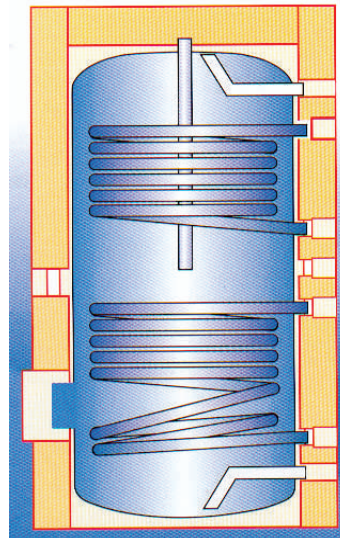

<b>Technical Data:</b>	<b>SSH 300</b>	<b>SSH 300 slim</b>	<b>SSH 400</b>	<b>SSH 500</b>	<b>SSH 750</b>	<b>SSH 1000</b>
<b>Height</b>	1340 mm	1630 mm	1710 mm	1820 mm	2090 mm	2010 mm
<b>Ø with insulation</b>	760 mm	710 mm	760 mm	810 mm	950 mm	1100 mm
<b>Ø without insulation</b>	600 mm	550 mm	600 mm	600 mm	750 mm	900 mm
<b>Weight</b>	164 kg	156 kg	178 kg	234 kg	344 kg	400 kg
<b>Cold feed/Hot out</b>	1"	1"	1"	1"	1½"	1½"
<b>Surface area HE solar</b>	1.3 m <sup>2</sup>	1.4 m <sup>2</sup>	1.7 m <sup>2</sup>	2.1 m <sup>2</sup>	2.7 m <sup>2</sup>	2.9 m <sup>2</sup>
<b>Surface area HE boiler</b>	1.0 m <sup>2</sup>	1.0 m <sup>2</sup>	1.2 m <sup>2</sup>	1.5 m <sup>2</sup>	1.9 m <sup>2</sup>	1.9 m <sup>2</sup>
<b>Circulation</b>	¾"	¾"	¾"	¾"	¾"	¾"
<b>Immersion</b>	1½"	1½"	1½"	1½"	1½"	1½"
<b>Max. pressure</b>	10 bar	10 bar	10 bar	10 bar	10 bar	10 bar
<b>Max. temperature</b>	95 <sup>0</sup>	95 <sup>0</sup>	95 <sup>0</sup>	95 <sup>0</sup>	95 <sup>0</sup>	95 <sup>0</sup>
<b>Suitable panel area</b>	<6 m <sup>2</sup>	<6 m <sup>2</sup>	<8 m <sup>2</sup>	<10 m <sup>2</sup>	<15 m <sup>2</sup>	<20 m <sup>2</sup>